





AQB-H2-FL

FLOOR STANDING
BOTTLE FILLING STATION

- Polished Stainless Steel and Silver ion antimicrobial protection on key plastic components inhibiting mold and mildew.
- Touchless sensor bottle filler activation
 1.1 GPM fill rate
- · Serves chilled water
- · 3,000-gallon filter for particulate, chlorine, taste and odor reduction.
- · Visual indicators: Saved plastic bottles counter & filter replacement time.

COOLING SYSTEM

• Compressor:

Hermetically-sealed, reciprocating type, single phase. Sealed-in lifetime lubrication.

• Condenser:

Fan cooled, copper tube with aluminum fins. Fan motor is permanently lubricated.

• Cooling Unit:

Combination tube-tank type. Insulated continuous copper tubing with self-extinguishing EPS foam.

• Refrigerant Control:


Refrigerant R-134a is controlled by accurately calibrated capillary tube.

• Temperature Control:

Easily accessible enclosed adjustable thermostat is factory preset. Requires no adjustment other than for altitude requirements.





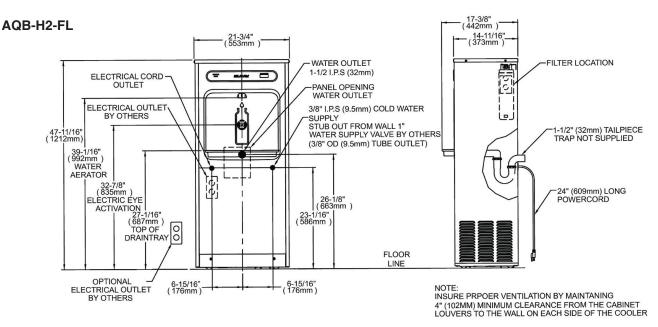

NOTE: NEW INSTALLATIONS MUST USE GROUND FAULT CIRCUIT INTRUPTER (GFCI) IT IS HIGHLY RECOMMENDED THAT THE CIRCUIT BE DEDICATED AND THE LOAD PROTACTION BE SIZED FOR 20 AMPS

Chilling Option*	8.0 GPH	Normal Water
Power:	115V/60Hz	Rated Watts:
Bubbler:	No Bubbler	Product Size:
Full Load Amps:	5	Packing Dimension:
Cold Water Tank:	3L	Weight:
Cold Water	30L/Hr at 6-8°C. (42-46°F)	Color:

Normal Water	200L/Hr
Rated Watts:	15
Product Size:	D21-1/2"*W15"*H48"
Packing Dimension:	24"*W19"*H50"
Weight:	94 lbs
Color:	Silver

SUITABLE FEED WATER TDS:

500ppm (maximum 2000ppm)

HOUSING

• Outside Housing:

SS304, 0.8mm Thickness

• Inner Tank:

SS304, 1.2mm Thickness

• Upper Cover:

SS304, 1.0mm Thickness Rim Folded Inside



Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards. Installation may require additional components and/or construction features to be fully compliant. Consult the local Authority Having Jurisdiction if necessary.



www.aquablufilters.com